


# SNZCXS-ALK Hexalobular Socket Extra Low Profile Miniature Screw / Nylon Patch

SUS Stainless steel Protrusion Vibration resistant treatment Miniature Size

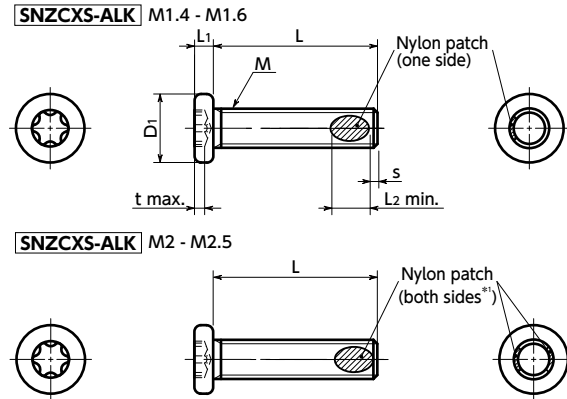

\*1: For dimension L of under 4 mm, nylon adhesion is on one side.

Material/Finish



SNZCXS-ALK	
Main Body	SUSXM7 (Equivalent to SUS304)
Nylon Adhesion	Nylon 11

- M1.4-M2.5. Miniature screw with nylon adhesion for precision instruments.
- The friction of the nylon adhered to the thread suppresses the return rotation of the thread, preventing the screw from falling out even if the tightening force decreases.
- The heat resistance temperature of nylon patch is 120°C.
- Flat head machine screw type with low head height. For space-saving of equipment/devices and applications with limited overhead space.
- Screw heads are unlikely to be damaged due to tightening, allowing safe and secure tightening to be performed.
- Install and remove with **SKX** Dedicated Wrench or **SKXB** Dedicated Bit and **SRD** Dedicated Magnetic Screwdriver together.

Part Number	Applicable Wrench	Applicable Bit
<b>SNZCXS-M1.4-ALK</b>	-	SKXB-3
<b>SNZCXS-M1.6-ALK</b>	SKX-4	SKXB-4
<b>SNZCXS-M2-ALK</b>	SKX-5	SKXB-5
<b>SNZCXS-M2.5-ALK</b>	SKX-6	SKXB-6

- Use the **SKX-N** hexalobular wrench for extremely limited access spaces for mounting and removing in tight spaces.
- We manufacture products with special specifications such as ventilation holes, cleanroom washing and special packaging.
- Application

Reducing the size of equipment and devices / Return and fall prevention of screws  
Compact precision equipment



Unit : mm


Part Number	M (Coarse)		L											Hexalobular Socket No.	t max.	Max. Torque (N·m)	Mass (g)	Qty per Pack
	Nominal of Thread	Pitch	2	3	4	5	6	8	10	2	0.5	0.6	1.4					
<b>SNZCXS-M1.4-ALK</b>	M1.4	0.3	2	3	4	5	6	8	10	2	0.5	0.6	1.4	3	0.25	0.03	0.025 - 0.091	50
<b>SNZCXS-M1.6-ALK</b>	M1.6	0.35	2	3	4	5	6	8	10	2.4	0.5	0.7	1.6	4	0.3	0.05	0.041 - 0.12	50
<b>SNZCXS-M2-ALK</b>	M2	0.4	2	3	4	5	6	8	10	3	0.6	0.8	2	5	0.35	0.12	0.063 - 0.2	50
<b>SNZCXS-M2.5-ALK</b>	M2.5	0.45	3	4	5	6	8	10	4	0.8	0.9	2.5	6	0.55	0.24	0.12 - 0.34	50	

\*1: If L<4, dimension s is 0.

• When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

Part Number Specification

**SNZCXS-M2-3-ALK**



Individual Sales Available / Add'l charge	Cleanroom Wash & Packaging Available / Add'l charge	Screw Length Adjustment Not Available	Vibration Resistant Not Available	Modification process for captive use Not Available
---	---	---------------------------------------	-----------------------------------	--

Related Products

**SKX** Hexalobular Wrench



**SKX-N** Hexalobular Wrench for Extremely Limited Access Spaces



**SKXB** Hexalobular Short Bit



**SRD** Magnet Screwdriver

